
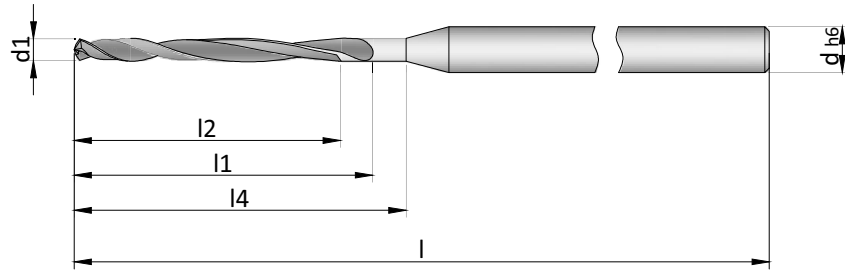


# 637 WINDRILL TURBO

(QUICKCHIP FLUTE DESIGN)

10 x d1



Alu	Alu > 9% Si	Steel < 1000 N/mm <sup>2</sup>	Steel < 1000-1400 N/mm <sup>2</sup>	Stainless Steel	Ni-Cr Alloy	GG	GGG	Copper	Brass	Titanium	Plastic
●	●	●		●		●	●	○	○	○	○

● Optimum ○ Good

VHM DM-21

Z=2

RH



SHRINK FIT



HSC

order no	d1 <sup>+0.001</sup> <sub>-0.002</sub> (m7 Coated)	l2	l1	l4	l	d
637.300.12	3.00	36.0	40.5	43.5	94	6
637.310.12	3.10	37.2	41.9	45.0	94	6
637.320.12	3.20	38.4	43.2	46.4	94	6
637.330.12	3.30	39.6	44.6	47.9	94	6
637.340.12	3.40	40.8	45.9	49.3	94	6
637.350.12	3.50	42.0	47.3	50.8	94	6
637.360.12	3.60	43.2	48.6	52.2	94	6
637.370.12	3.70	44.4	50.0	53.7	94	6
637.380.12	3.80	45.6	51.3	55.1	94	6
637.390.12	3.90	46.8	52.7	56.6	94	6
637.400.12	4.00	48.0	54.0	58.1	94	6
637.410.12	4.10	49.2	55.4	59.5	107	6
637.420.12	4.20	50.4	56.7	61.0	107	6
637.430.12	4.30	51.6	58.1	62.4	107	6
637.440.12	4.40	52.8	59.4	63.9	107	6
637.450.12	4.50	54.0	60.8	65.3	107	6
637.460.12	4.60	55.2	62.1	66.8	107	6
637.470.12	4.70	56.4	63.5	68.2	107	6
637.480.12	4.80	57.6	64.8	69.7	107	6
637.490.12	4.90	58.8	66.2	71.1	107	6
637.500.12	5.00	60.0	67.5	72.6	107	6
637.510.12	5.10	61.2	68.9	74.0	122	6
637.520.12	5.20	62.4	70.2	75.5	122	6
637.530.12	5.30	63.6	71.6	76.9	122	6
637.540.12	5.40	64.8	72.9	78.4	122	6
637.550.12	5.50	66.0	74.3	79.8	122	6
637.560.12	5.60	67.2	75.6	81.3	122	6
637.570.12	5.70	68.4	77.0	82.7	122	6
637.580.12	5.80	69.6	78.3	84.2	122	6
637.590.12	5.90	70.8	79.7	85.6	122	6
637.600.12	6.00	72.0	81.0	87.1	122	6

- DIAMETER TOLERANCE IS BEFORE COATING, AFTER COATING DIAMETER TOLERANCE IS m7
- EDGE PREPARATION ON REQUEST
- COATING ON REQUEST
- LASER MARKING ON REQUEST
- SPECIAL DIAMETERS & LENGTHS ON REQUEST