
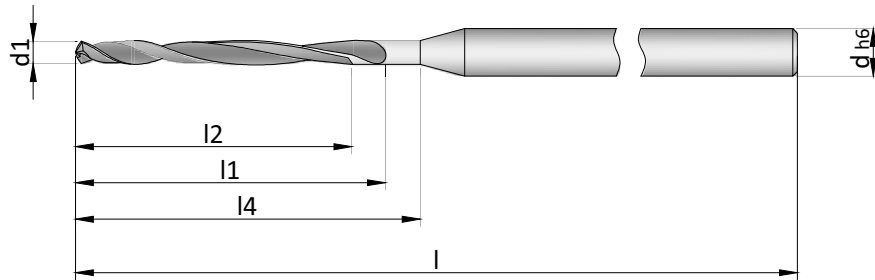


637

WINDRILL TURBO (QUICKCHIP FLUTE DESIGN)

6 x d1



Alu	Alu > 9% Si	Steel < 1000 N/mm ²	Steel < 1000-1400 N/mm ²	Stainless Steel	Ni-Cr Alloy	GG	GGG	Copper	Brass	Titanium	Plastic
●	●	●		●		●	●	○	○	○	○

● Optimum ○ Good

order no	d1 ^{+0.001} _{-0.002} (m7 Coated)	l2	l1	l4	l	d
637.300.08	3.00	24.0	28.5	30.6	75	6
637.310.08	3.10	24.8	29.5	31.7	75	6
637.320.08	3.20	25.6	30.4	32.7	75	6
637.330.08	3.30	26.4	31.4	33.7	75	6
637.340.08	3.40	27.2	32.3	34.7	75	6
637.350.08	3.50	28.0	33.3	35.7	75	6
637.360.08	3.60	28.8	34.2	36.8	75	6
637.370.08	3.70	29.6	35.2	37.8	80	6
637.380.08	3.80	30.4	36.1	38.8	80	6
637.390.08	3.90	31.2	37.1	39.8	80	6
637.400.08	4.00	32.0	38.0	40.9	80	6
637.410.08	4.10	32.8	39.0	41.9	94	6
637.420.08	4.20	33.6	39.9	42.9	94	6
637.430.08	4.30	34.4	40.9	43.9	94	6
637.440.08	4.40	35.2	41.8	44.9	94	6
637.450.08	4.50	36.0	42.8	46.0	94	6
637.460.08	4.60	36.8	43.7	47.0	94	6
637.470.08	4.70	37.6	44.7	48.0	94	6
637.480.08	4.80	38.4	45.6	49.0	94	6
637.490.08	4.90	39.2	46.6	50.0	94	6
637.500.08	5.00	40.0	47.5	51.1	94	6
637.510.08	5.10	40.8	48.5	52.1	94	6
637.520.08	5.20	41.6	49.4	53.1	94	6
637.530.08	5.30	42.4	50.4	54.1	94	6
637.540.08	5.40	43.2	51.3	55.1	94	6
637.550.08	5.50	44.0	52.3	56.2	107	6
637.560.08	5.60	44.8	53.2	57.2	107	6
637.570.08	5.70	45.6	54.2	58.2	107	6
637.580.08	5.80	46.4	55.1	59.2	107	6
637.590.08	5.90	47.2	56.1	60.3	107	6
637.600.08	6.00	48.0	57.0	61.3	107	6

VHM DM-21

Z=2

RH



6 x d1



Type-HA

SHRINK FIT



HSC

- DIAMETER TOLERANCE IS BEFORE COATING, AFTER COATING DIAMETER TOLERANCE IS m7
- EDGE PREPARATION ON REQUEST
- COATING ON REQUEST
- LASER MARKING ON REQUEST
- SPECIAL DIAMETERS & LENGTHS ON REQUEST